


Quick Set-Up Guide for the Dynamic Duo

Connecting Mounting Bracket

- Unscrew the bolts from the light, put the bolt through the light bracket, put the rubber washer back on the bolt inside the bracket, and screw them back into the light.
- 2. Use the included hardware to secure the stand bracket onto the light bracket
- 3. Place the light on the adjustable stand and secure it with the tightening bolt. Setup the stand and the 2 lights within 30 feet of each other.

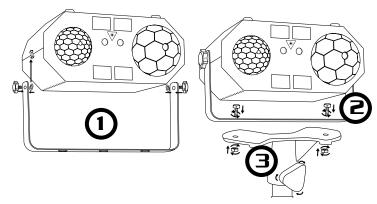

SETUP for DMX Control

- Connect the DMX cable to the two lights, connect one end to the DMX OUT on one light, and connect the other end to the DMX IN on the other light. The light with the DMX OUT will be the main unit where the built-in microphone will pick up the sound to synchronize the light show. The light with DMX IN will be the slave unit.
- On the main unit with DMX Out, use the Menu Button to select one of the 2 Sound Modes, the display will read S100 or S200 and the number will increase as it cycles through the effects.

Sound Mode 1 is for a smaller sound source like home Bluetooth speakers or smartphone speakers.

Sound Mode 2 is for loud club environments. Use the **Up and Down Arrow** to adjust the sensitivity to get the desired intensity of the light show.

 On the slave unit with DMX IN, use the Menu Button to change to the 3rd mode, the display will read as A030, wait for a second for the slave unit to a detect a DMX input and it will switch to slave mode.

Please note:

- * The DMX synchronization is for all effects except the laser graphics due to the graphic wheel on the 2 lights being random
- ** The carrying bag are sold separately

